

AMPHIBIO HYDRA 2

Engine

Briggs & Stratton Series 950E

Type:	4-stroke
Piston displacement:	223 ccm
Authorized output:	6 HP
Fuel:	Petrol
Fuel consumption:	1.3 l at 3,000 rpm
Starting system:	Manual rope
Valve mechanism:	OHV
Engine cooling:	Air cooling
Protection:	Waterproof

Pump

AMPHIBIO

Type:	Single suction, centrifugal
Outlet:	DSP65
Max. Performance:	1150 l/min
Max. Pressure:	4 bar
Min.suction depth:	15 mm

Dimensions and weight

Dimensions (l × w × h):	786 x 595 x 392 mm
Dry Weight:	30 kg

Float

Impact resistance polyethylene

Fuel tank

6 liters fuel tank

Pump body

Aluminum alloy


Operation time:

min. 2,5 hours

Commissioning time

30 second

Gasoline floating motor pump for heavy water with new ergonomic handles for user and better stowage and higher stability on water surface.

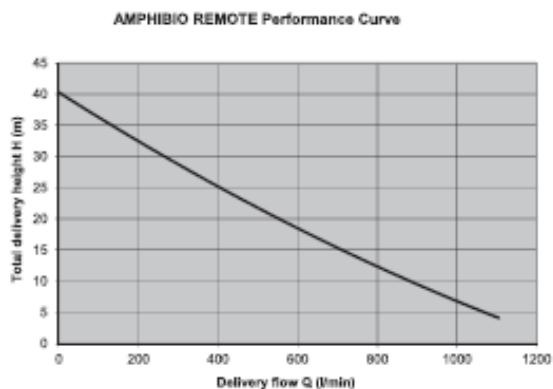

PORTABLE FLOATING PUMPS